


Products in Family

DRSX8440/8GB (2 x 4GB 2Rx4 DIMMs)
 DRSX8440/16GB (2 x 8GB 2Rx4 DIMMs)



Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.20" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage: 1.8 V ±0.1 Error Checking and Correction (ECC) bits Supports Intel SDDC and Chipkill Advanced ECC Features Fully RoHS Compliant		Each DRSX8440 upgrade consists of a matched pair of DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.
Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
DRSX8440/8GB DRSX8440/16GB	X4261A Not Offered by Sun	Sun Blade X8420 and X8440 Server Modules

Front view

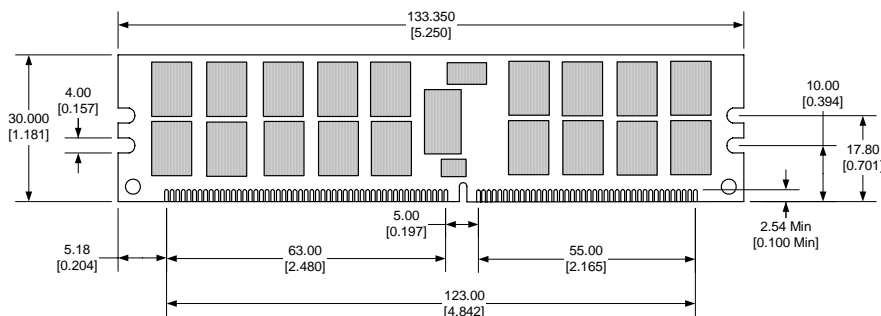


Notes

Tolerances on all dimensions except where otherwise indicated are \pm .13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

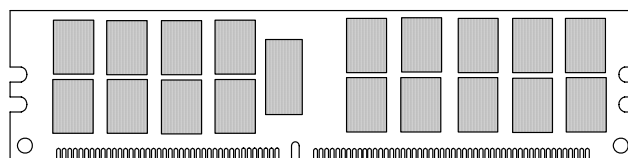

Side view

